

7300 M30 Superfast Primer

silco[®]

2K High Build Primer Filler Spray

Ultra fast drying surfacer for perfect refinish results within minutes.

- / Exceptionally fast drying times
- / Sanding after 15 min at 20°C
- / Excellent adhesion on various substrates
- / Very easy application with short flash-off time
- / At least 30 days of potlife
- / Easy sanding without paper clogging



7300 M30 Superfast Primer

2K High Build Primer Filler Spray

Drying time

20°C	15 min
60°C	5 min
Flash-off	2–3 min
Potlife*	min 30 days


* The processing time depends on the ambient temperature.
Higher temperatures reduce the pot life.

How to use?

Light half coat followed by full closed coat with 2–3 minute flash-off can be used for priming. This way you achieve up to 60 microns of dry film with 8–10 minutes sanding time. Hold the can as vertical as possible and ensure a distance of approx. 25 cm.

Two normal full coats (with 2–3 minutes flash-off) and up to 100 microns will result in 15 minute sanding time.

For further and updated information please refer to the TDS published on www.silco.si.

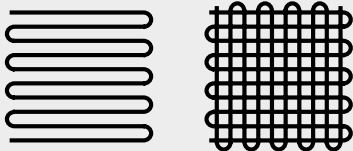

SPRAY PROCESS

Start with the spraying outside the painting surface and apply several thin layers evenly in a "cross coat".

Packaging

7300 M30 Superfast Primer
2K High Build Primer Filler Spray

Prod. Nr.	Content
7300-C-0,4	400 ml

Product info

Top-quality acrylic primer-filler with exceptionally fast drying time suitable for fast repair process of small and larger surfaces. The filler is air dry in 15 minutes at 20°C. Possible to apply to bare metal. The surface is smooth, sanding after 15 minutes from application is easy without paper clogging.

How to activate?

